

# Air Cooled Condenser




## Features

- To condense and cool down cooking vapours from both “Batch” and “Continuous” cooking process
- Unit capacity upto 9000 kg/hr
- Very rigid construction where all material in contact with the vapours and condensate are stainless steel
- Easy removable cover plates on the headers for quick and simple inspection and cleaning of the inside of the condensers
- Tubes manufactured in stainless steel with aluminium cooling fans
- Fan housings made out of galvanized steel
- Standard supplied with galvanized steel support frame, walkway and cage ladder



**MAVITEC**

# Air Cooled Condenser

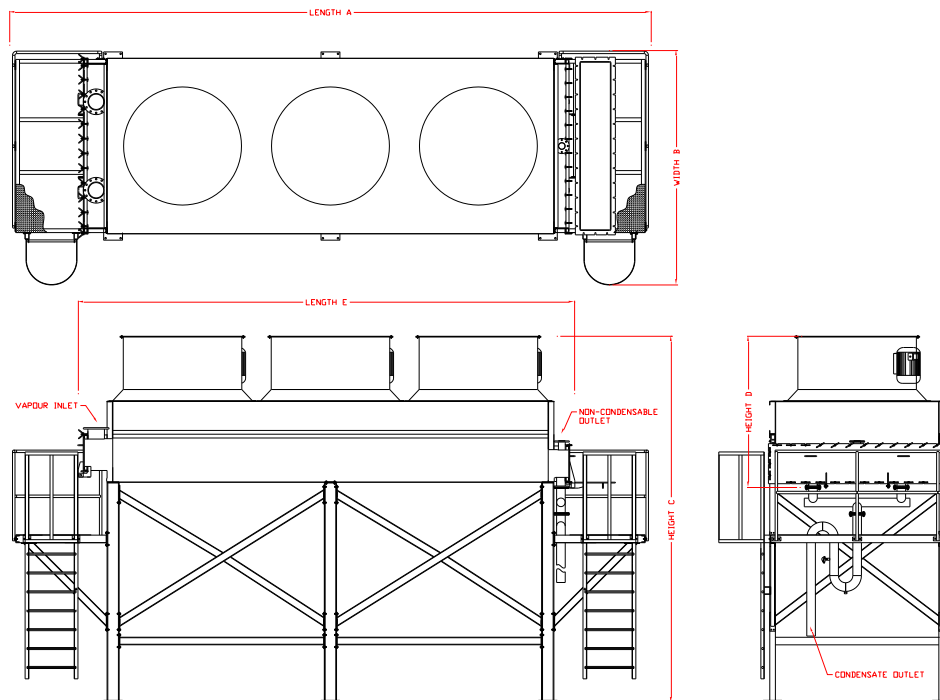

## Specifications

Model	Capacity kg/hr	Power kW	No. of fans	Length (A) mm	Width (B) mm	Height (C) mm
50	1800	22	2	8500	3100	4900
85	2800	22	2	8500	3100	4900
170	3500	33	3	8500	3100	4900
225	5000	44	4	10500	3100	4900
7500	7500	44	2	10500	4000	5800
9000	9000	66	3	12500	4000	5800

Due to ongoing product improvements, data shown here is subject to change without notice.  
Contact Mavitec B.V. for latest specifications.

# MAVITEC

Galileistraat 20, 1704 SE Heerhugowaard, The Netherlands  
Tel.: +31-72-574 59 88 - Fax: +31-72-574 55 48  
E-mail: info@mavitec.com - www.mavitecgreenenergy.com